

Networked Audio Encoder/ Decoder/Amplifier with Intercom

This audio decoder accepts streaming audio input and delivers line level audio output, making it easy to connect a Conductor™ IP-based paging platform to standard 70v amplifier/speaker infrastructure in common or outdoor areas. It accepts network-based “pass through” commands — so FrontRow’s Encore™, Maestro™, and Conductor™ network software can control and help you manage devices that are not directly networkable.



KEY BENEFITS

- Brings Conductor IP-based paging to 70V amps and speakers
- Converts your analog PA system to an IP-based streaming solution
- Puts even non-networked devices on the network


SPECIFICATIONS

Network support	10/100Mb/s (auto sensing)
Serial Baud rate	2400 to 115200 baud
Power supply	9V 500mA
Size (wxhxd)	9.8 x 6.4 x 2.3cm/3.84 x 2.5 x .913in
Weight	0.35kg/0.77lbs

INPUTS/OUTPUTS

- (1) input power jack
- (1) Network jack (RJ45)
- (1) Unbalanced stereo audio input jack (3.5mm)
- (1) Mic input jack (3.5mm)
- (1) Amplifier balanced/unbalanced stereo/mono line output jack (3.5mm)
- (2) 4-pin captive screw general purpose output (GPO) relay terminals
- (3) 4-pin captive screw general purpose input (GPI) relay terminals
- (1) Infrared control output jack (3.5mm)
- (1) 3-pin captive screw RS232 serial control input/output terminal

Right Side

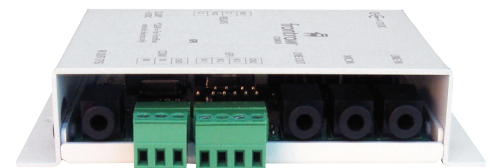

Left Side

