
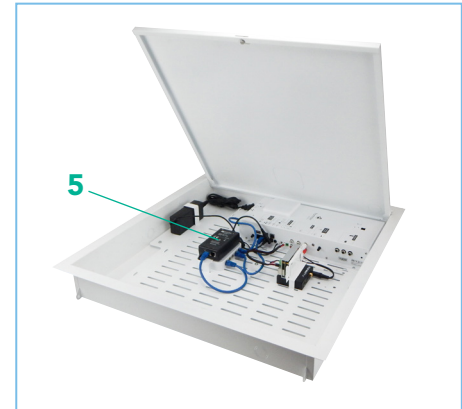


POE-X Extractor

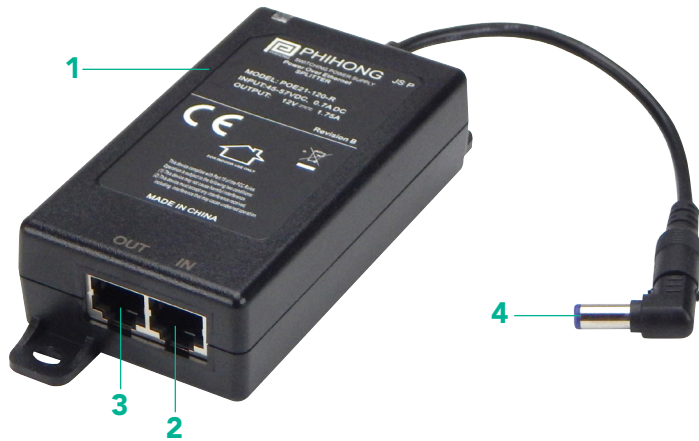

1 Keeps paging and other emergency alert functions running during a power outage

The POE-X extractor supplies ezRoom with power if mains power fails. The ezRoom Smart Receiver automatically and instantly switches to PoE when a power loss is detected.

Works with any qualified third-party POE midspan injector and POE-enabled network switch

2 Network power/data input

3 Network pass-through output

4 12V/1.75A (21W) output

5 Mounts inside Plenum Enclosure

SPECIFICATIONS

Network support: 10/100Mb/s (auto sensing)

Power output: 21W

INPUTS/OUTPUTS

- (1) Network input jack with POE (RJ45)
- (1) Network output jack (RJ45)
- (1) Corded power plug (2.1mm)

MIDSPAN INJECTOR REQUIREMENTS

POE Type: High Power Midspan Injector

POE Standard: POE IEEE 802.3at

Device Pin-out: 1pins 4,5 DC power (+), pins 7, 8 DC power (-)

POE Protection: Over Temp, Over Current, Over/Under Voltage

Power: >30W per Port