


Universal Telephone Interface

Users dial an extension and enter the designated touch tone buttons to access the required paging function. The CMP500 can be set with a security code for extra protection. In addition to paging, the CMP500 can be set up to initiate actions such as triggering a sequence which locks doors, plays pre-recorded emergency announcements, changes digital signage display information, etc. An onboard browser-based interface lets you easily assign actions to key codes, set up custom outbound messaging and ring delays, and define passwords.

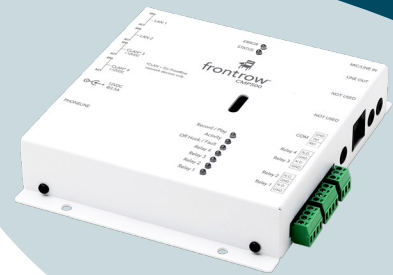

KEY BENEFITS

- Adds all-call, zone paging and individual room paging from any phone
- Dial-in device control and automated actions
- Universal phone compatibility

SPECIFICATIONS

Network support	10/100Mb/s (auto sensing)
Compatibility	Analog (PBX) with DTMF tone decoding, SIP (via ATA bridge), mobile
Power supply	12VDC at 3.5A
Size (wxhxd)	13 x 14.9 x 2.86cm/5.125 x 5.875 x 1.125in

INPUTS/OUTPUTS

- (4) Network input jacks (RJ45)
- (1) Power jack (12VDC)
- (4) Phone jack (RJ11)
- (1) Mic/line audio input jack (3.5mm)
- (1) Line audio output jack (3.5mm)
- (1) Intercom input jack (RJ45)
- (1) Infrared remote output jack (3.5mm)
- (1) 3-pin captive screw serial control terminal
- (4) 4-pin captive screw relay terminals

Right Side



Left Side

