




# Juno POE Extractor

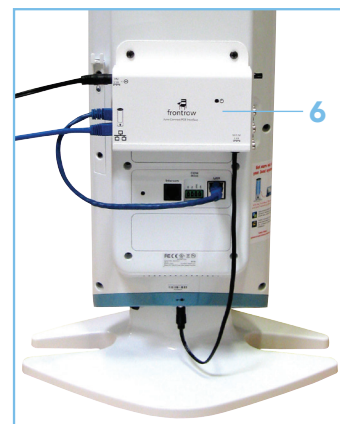

## 1 Keeps paging and other emergency alert functions running during a power outage

The Juno POE extractor supplies Juno with the higher peak power levels it requires. Uses 18VDC mains power when POE is not required, then automatically and instantly switches to POE if mains power fails.

## Works with any qualified third-party POE midspan injector and POE-enabled network switch

Installs as a bridge between the POE cable and the network endpoint, and breaks out both network and power signals from the incoming cable, sending them on as needed for amplifier support.

## 2 Network power/data input

## 3 Network pass-through output

## 4 12V/1.77A (21W) output

## 5 18V DC input

## 6 Easily mounts to Juno Tower

Mounts transparently to Juno using VESA mounting holes. Can also be mounted in combination with VESA wall mount.

## SPECIFICATIONS

Network support	10/100Mb/s (auto sensing)
External power supply	18VDC at 3.5A
Size (wxhxd)	13 x 10.2 x 3.1cm/5.12 x 4 x 1.25in
Inputs/Outputs	(1) RJ45 network input jack with POE (1) RJ45 network output jack (1) 2.1mm corded power plug (1) 2.1mm power input jack

## MIDSPAN INJECTOR REQUIREMENTS

POE Type	High Power Midspan Injector
POE Standard	POE IEEE 802.3at
Device Pin-out	Pins 4, 5 DC power (+) Pins 7, 8 DC power (-)
POE Protection	Over Temp Over Current Over/Under Voltage
Power	30W per Port

Learn more at [gofrontrow.com](https://gofrontrow.com)