

Lay-in Ceiling Speaker Installer Guide

Intended Use:

Indoor environment, mounted parallel to floor plane in a 60cm/24in wide, suspended ceiling tile grid. Mount height 5.5m/18ft or less above floor plane.

1. Cut ceiling tile as required:

60x60 cm/2x2 ft tile – Cut tile in half along one axis.

60x120 cm/2x4 ft tile – Cut 30cm/12in from edge along 60cm/2ft axis and discard smaller piece.

ⓘ **Steps 2-3 only** – Required if using conduit clamp fitting *other than what is provided* with product.

2. Loosen, but do not remove screws on cover plate.


Push up and remove plate from assembly.

3. Remove cable/conduit clamp fitting from plate.

Install UL Listed metallic enclosure entry fitting for plenum cable or flex whip.

4. Feed supply cable through whip to connector.

Make connection per wiring diagram. When cover plate is secured, all connections/splices must be inside of the enclosure.

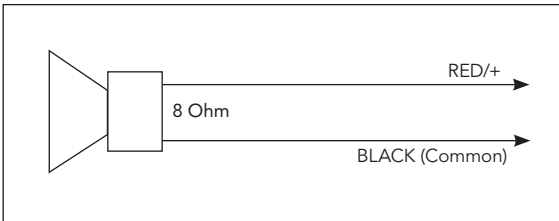

5. Place assembly onto ceiling grid.

Install T-bar trim piece where required.

NOTE! AHJ/local codes may require tie-off to structure. Bend up tie-off tabs and install as directed.

NOTE! AHJ/local codes may require tie-down to grid.

Recommended fasteners *not supplied*. Erico/Caddy part ATA4i and 1/4" -20 x 2" bolt, or equivalent. Install as directed.

6. Place remaining ceiling tile into opening as required.